

Product Code	Description
HC2722L-DP	20AX 2 Gang 1 Way Double Pole Switch with Indicator Light




HC2722L-DP

Technical Specification

- Rated Voltage: 250VAC, 50/60Hz
- Rated Current: 20AX
- SBL* Load: 250W
- Recommended wire size:
4mm² - 6mm²
- Isolating Gap Contact: 3mm nominal
- Contact Material: Silver-Nickel Alloy
- Operating Temperature:
-5°C to +40°C
- IP Rating: IP2X
- Indicator light: Blue LED
- Dimensions: 86 x 86 x 10mm (WxHxD)
- Fix Center: 60.3 mm
- Fix Screw: M3.5 x 0.6 x 30mm±
- Mounting box: >25mm depth
 - R1150, flush mounting, plastic
(80 x 80 x 48.4mm) (WxHxD)
 - M1247, flush mounting, metal
(79 x 73 x 47mm) (WxHxD)
- Comply to standards:
 - BSEN 60669-1
 - IEC 60669-1
 - GB/T 16915.1

*SBL- Self-Ballasted Lamp

Typical Wiring

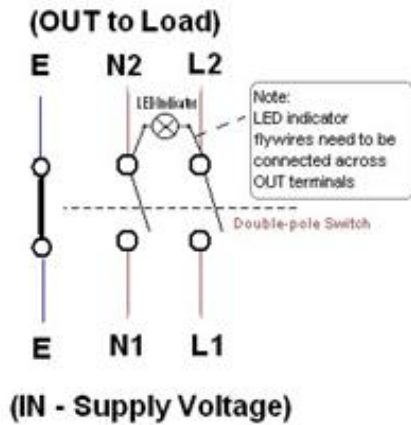

Note:

For high current load application, use the ferrules/sheaths provided for wire terminations.



Product Code	Colour
HC2722L-DP	 White
HC2722L-DP-SBL	 Matt Black (SBL)
HC2722L-DP-PS7	 Dark Champagne (PS7)
HC2722L-DP-ST5	 Champagne Grey (ST5)
<i>For other colour, please contact T&J Sales representative</i>	

Multi-Gang Adaptor Frames			Product Dimension Scale: mm
