

# 1 Gang 20A DP Switch with Indicator Light

## Specifications

### Electrical:

- Rated Voltage: 250VAC 50/60Hz
- Rated Current: 20AX
- Recommended wire size: 1.5mm<sup>2</sup>- 4mm<sup>2</sup>
- Indicator: Red LED

### Mechanical:

- Contact material: Silver-Nickel alloy
- Isolating gap contact: 3mm nominal
- Minimum no. of operations: 20,000 @20A
- Overall dimension: 88mm x 86mm x 32mm (HxWxD)
- BS 4662 wall box compatible
- Fixing screw centre: 60.3mm




### Environmental:

- Operating Temperature: -5°C to +40°C
- IP Rating: IP2X

### Standards:

- IEC60669-1

## Wiring diagram

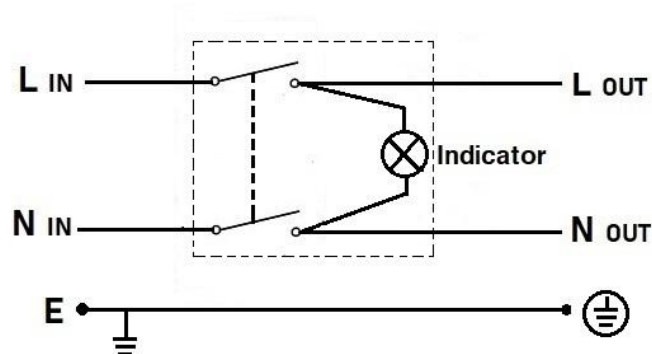

## Ordering information

Colour	Part No.
White	GA2721L-WH
Champagne Grey	GA2721L-ST5
Champagne	GA2721L-PS7
Matt Black	GA2721L-SBL

The information given in this document may be amended. You are also reminded that all products must be installed by a qualified professional.