


Product Code	Description
JC223-W	10AX Blind Switch

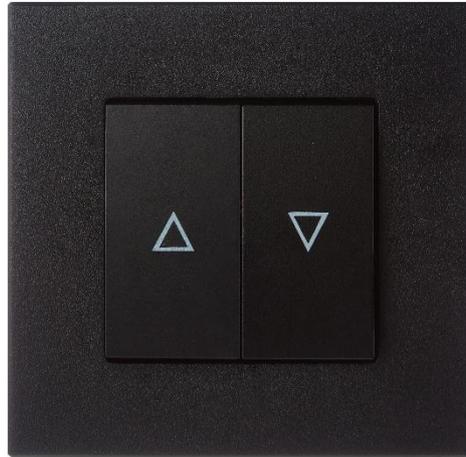

JC223-2-W-LBL

## Technical Specification


- Rated Voltage: 250VAC, 50/60Hz
- Rated Current: 10AX
- Recommended wire size:  
1.5mm<sup>2</sup> ~ 2.5mm<sup>2</sup>
- Isolating Gap Contact: 3mm nominal
- Contact Material: Silver-Nickel Alloy
- Operating Temperature:  
-5°C to +40°C
- IP Rating: IP4X
- No. of operations:  
40,000 at 10 Amp.
- Fix Center: 60.3mm
- Fix Screws:  
M3.5 x 0.6 x 25mm±

### With Lavina '95 Frame: JC1401


- Dimensions: 95x95x10mm (WxHxD)
- Mounting box: >40mm depth
  - J1040, flush mounting, plastic  
74.5 x 74.5 x 42mm (W x H x D)
  - M1050, flush mounting, metal  
75.5 x 64 x 50mm (W x H x D)
- Comply to Standards:
  - IEC 60669-1
  - BS EN 60669
  - GB/T 16915.1

**Note:** The two switches are equipped with a mechanical interlock to prevent simultaneous activation. Specifically, if the "Down" switch is in the ON position, it must be toggled to the OFF position before the "Up" switch can be turned on, and vice versa.

### Typical Switch Connection:

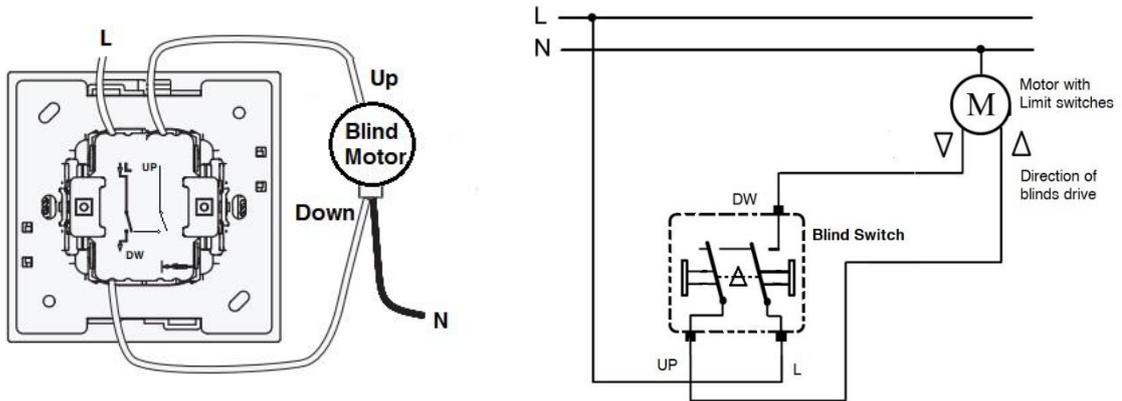

### Mounting Diagram (for reference)

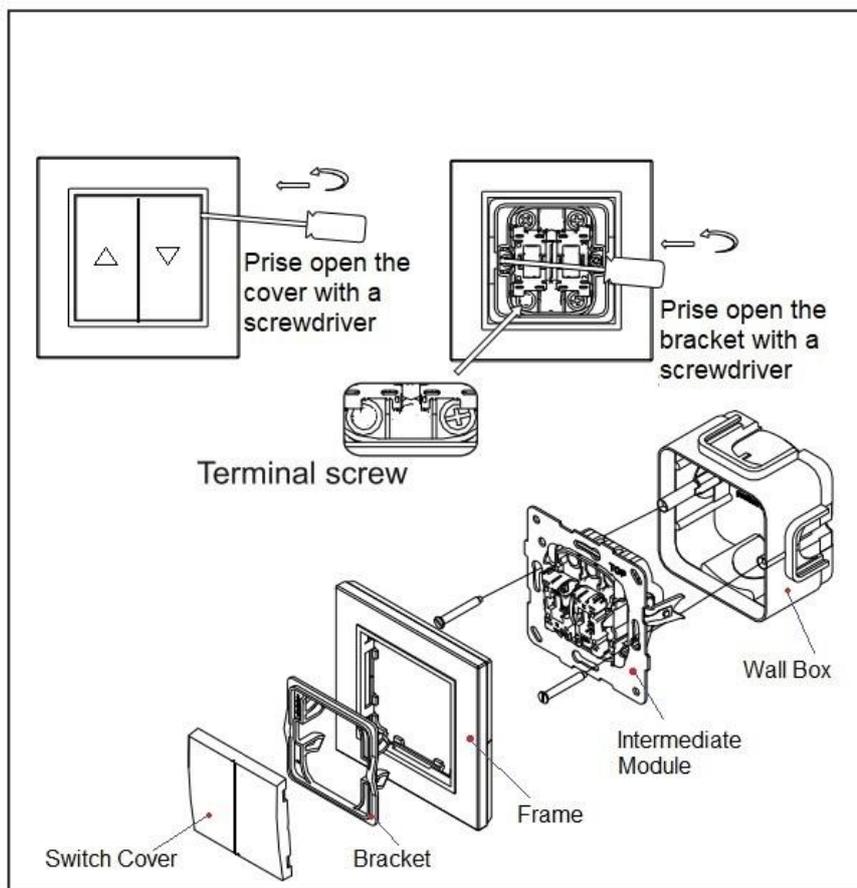

Product Code	Colour
JC223-W-LWH	 Matt White
JC223-W-LBL	 Matt Black
<i>For other colours, please contact T&amp;J Sales representative</i>	