


| Product Code | Description             |
|--------------|-------------------------|
| GC253-2      | 10A 3 Gang 2 Way Switch |




GC253-2-BFSS



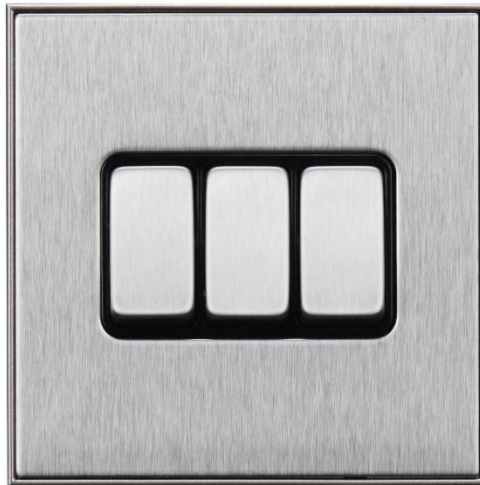

## Technical Specification

- Rated Voltage: 250VAC, 50/60Hz
- Rated Current: 10AX
- Recommended wire size:  
1.5mm<sup>2</sup> ~ 2.5mm<sup>2</sup>
- Isolating Gap Contact: 3mm nominal
- Contact Material: Silver-Nickel Alloy
- Operating Temperature:  
-5°C to +40°C
- IP Rating: IP4X
- No. of operations:  
40,000 at 10 Amp.
- Dimensions: 86 x 86 x 4mm (WxHxD)
- Fix Center: 60.3mm
- Fix Screws (2x each):  
M3.5 x 0.6 x 25mm±  
M3.5 x 0.6 x 15mm±
- Mounting box: >25mm depth
  - R1150, flush mounting, plastic  
(80 x 80 x 48.4mm) (WxHxD)
  - M1247, flush mounting, metal  
(79 x 73 x 47mm) (WxHxD)
- Comply to standards:  
GB 16915  
IEC 60669-1  
BS EN 60669

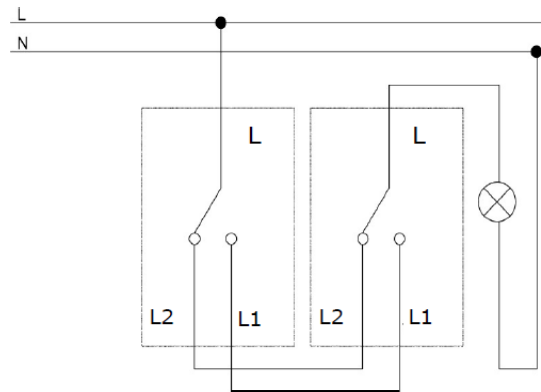**Note:** The metal frame needs to be earthed.

## Typical 2-way switch connection



| Product Code  | Colour   |
|---|--|
| GC253-2-BFSS  |  Black Interior, Stainless Steel, Fingerprint Proof, Statin Nickel              |
| GC253-2-BFMR  |  Black Interior, Electroplated with Matt Brass, Fingerprint Proof, Satin Brass |
| GC253-2-BSBL  |  Black Interior, Matt Black   |
| GC253-2-BLQB  |  Black Interior, Antique Brass  |
| <i>For other colours, please contact T&amp;J Sales representative</i> |  |