

| Product Code | Description                                                                   |
|--------------|-------------------------------------------------------------------------------|
| JC8318USBC-W | 13A 250V Universal Socket Outlet & Twin USB Charger (USB-A + USB-C, 2.1A Max) |



JC8318USBC-W-LBL


## Technical Specification

- Socket rated voltage: 250VAC, 50/60Hz
- Socket rated current: 13A (3-pin BS Plug)
- USB Charger input supply:  
250V 50/60Hz, 0.5A max.
- USB Charger output:  
5VDC/2.1A max.  
(USB-A, USB-C shared)
- USB Charger with built-in over-heat, overload and short-circuit protection
- Recommended wire size: 2.5mm<sup>2</sup> - 4mm<sup>2</sup>
- Fix Centre: 60.3mm
- Fix Screw: M3.5 x 0.6 x 25mm±


### With Lavina '95 Frame: JC1401

- Dimensions: 95 x 95 x 10mm (WxHxD)
- Mounting box: >40mm depth
  - J1040, flush mounting, plastic  
(74.5 x 74.5 x 42mm) (WxHxD)
  - M1050, flush mounting, metal  
(75.5 x 64 x 50mm) (WxHxD)
- Comply to Standards:
  - IEC 62368-1
  - IEC 60884-1

**Note:** This product is rated at 13A max. (factory specs.)

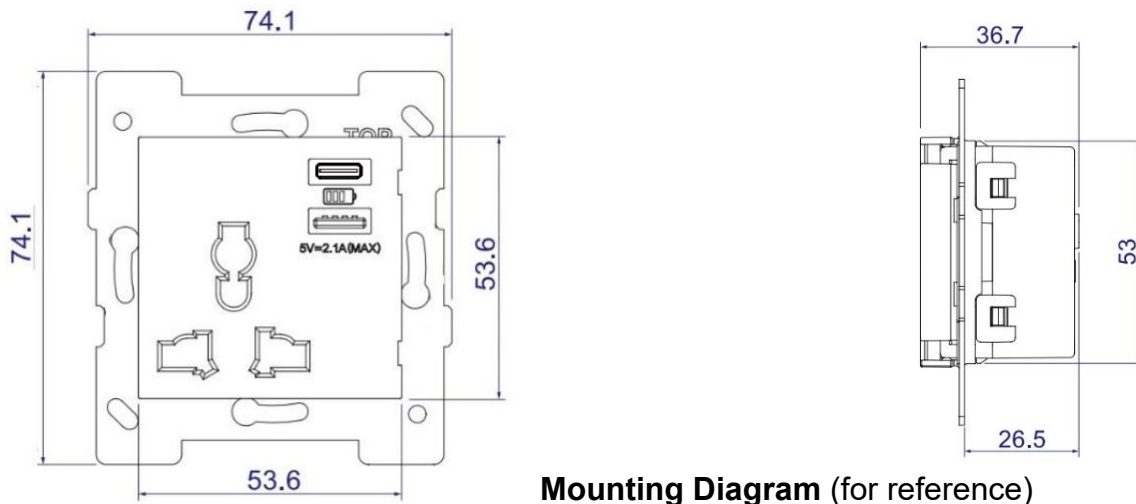

13A Universal socket with USB(2.1A)

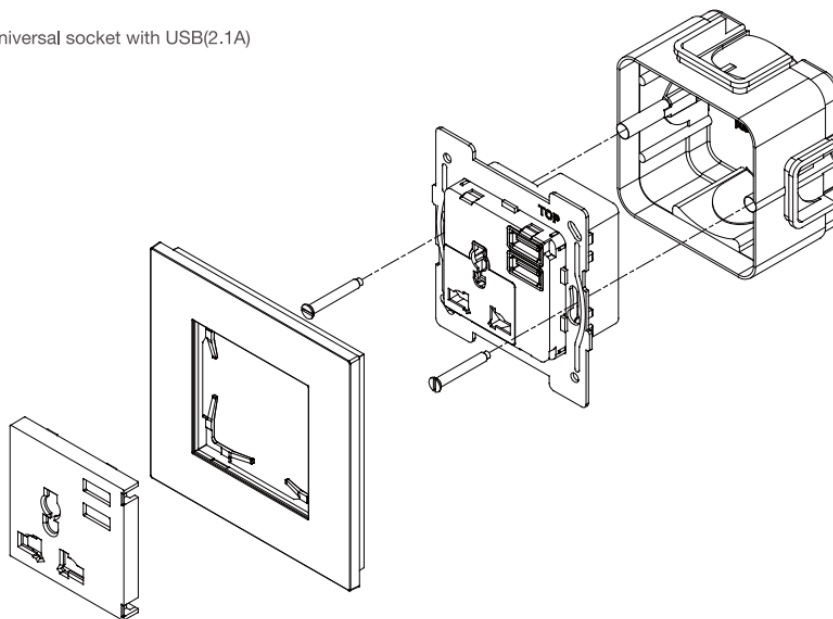

**Applicable on selected type of plugs:**

| Plug                   | Description  |
|------------------------|--------------|
| 2-pin Plug (Non-earth) | 2.5A, 250V   |
| 2-pin Plug (Euro)      | 2.5A, 250V   |
| 2-pin Plug Round       | 10/16A, 250V |
| 2-pin Plug (Non-earth) | 10/16A, 250V |
| 3-pin Plug (BS)        | 13A, 250V    |
| 3-pin Plug Round (BS)  | 5A, 250V     |
| 2-pin Australia Plug   | 7.5A, 250V   |
| 3-pin Australia Plug   | 10A, 250V    |
| 3-pin Australia Plug   | 15A, 250V    |
| 3-pin China Plug       | 6/10A., 250V |

|                  |              |
|------------------|--------------|
| 2-pin China Plug | 6/10A., 250V |
|------------------|--------------|

| Product Code                                                          | Colour                                                                            |            |
|-----------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------|
| JC8318USBC-W-LWH                                                      |  | Matt White |
| JC8318USBC-W-LBL                                                      |  | Matt Black |
| <i>For other colours, please contact T&amp;J Sales representative</i> |                                                                                   |            |

**Note:**

Disconnect before Insulation Resistance test to avoid injecting high test voltage across the USB Charger.